Multi-Housing

Manual Commercial Top Load Washer Rear Control






BUILT FOR RELIABLE PERFORMANCE

- U.S. DOE compliance for energy and water efficiencies
- Durable stainless steel washtub
- Automatic balancing suspension system
- Extract speed of 710 RPM spins clothes out drier
- Curved four-vane polypropylene agitator
- Self-adjusting leveling legs
- Low water consumption

MANUAL CONTROL

- Multi-cycle timer knob
- Three wash temperatures Hot, warm, cold
- Three fabric types Normal, perm press and delicate
- Extra rinse

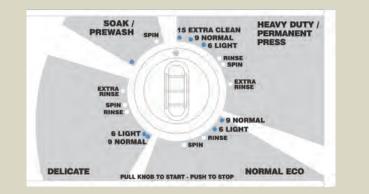



MANUAL COMMERCIAL

TOP LOAD WASHER

LWN432SP113TW01


MODEL



DELICATE PULL NEED TO STATE PULK TO STOP MORMAL ECO	
Appearance	
Color	White
Tuff Guard Top and Lid Finish	Yes
Control Panel Location	Rear
Water and Energy Info	
Modified Energy Factor "MEF" - ft ³ /kWh/cycle (Liters/kWh/c	:yclð)29 (36.65)
Water Factor "WF" - gal/ft ³ (Liters/Liter/cycle)	6.8 (56.15)
Water Consumption - gal (Liter)	20 (75.71)
Technical Info	
Stainless Steel Basket Volume - cu.ft. (liters)	3.3 (95)
Net Weight - lb (kg)	180 (82)
Shipping Weight - Ib (kg)	195 (88)
Electrical Requirements	120/60/1-15 amp
Overall Dimensions WxDxH - in (mm): 25 5/8 (651) x 28 (71	1) x 43 (1092)
Cabinet Height - in (mm)	36 (914)
Water Temperature	Hot, Warm, Cold
Cycle - Soak/Prewash, Heavy Duty/Permanent Press, Norma	al Eco, Delicate
Motor - Reversing	1/2 HP,60 Hz
Water Pressure psi (Bar) Pressure Fill - 20 to 120 psi	1.4/8.3
Spin Speed - RPM 710	2 Speed
Performance/Features	
Fabric Softener and Bleach Dispenser	Yes
Agency Approval	շՍԼսչ
Fabric Softener and Bleach Dispenser	

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

SPECIFICATIONS

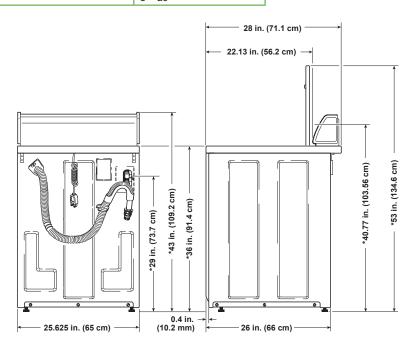



© 2014 Alliance Laundry Systems LLC AM14-0021 Speed Queen | 800-345-5649 | www.speedqueen.com/route

